


MTP PRO connector optional

CONNECTION TABLE

CONNECTION TABLE	
MTP	LC
1	1B
2	2B
3	3B
4	4B
5	
6	
7	
8	
9	4A
10	3A
11	2A
12	1A

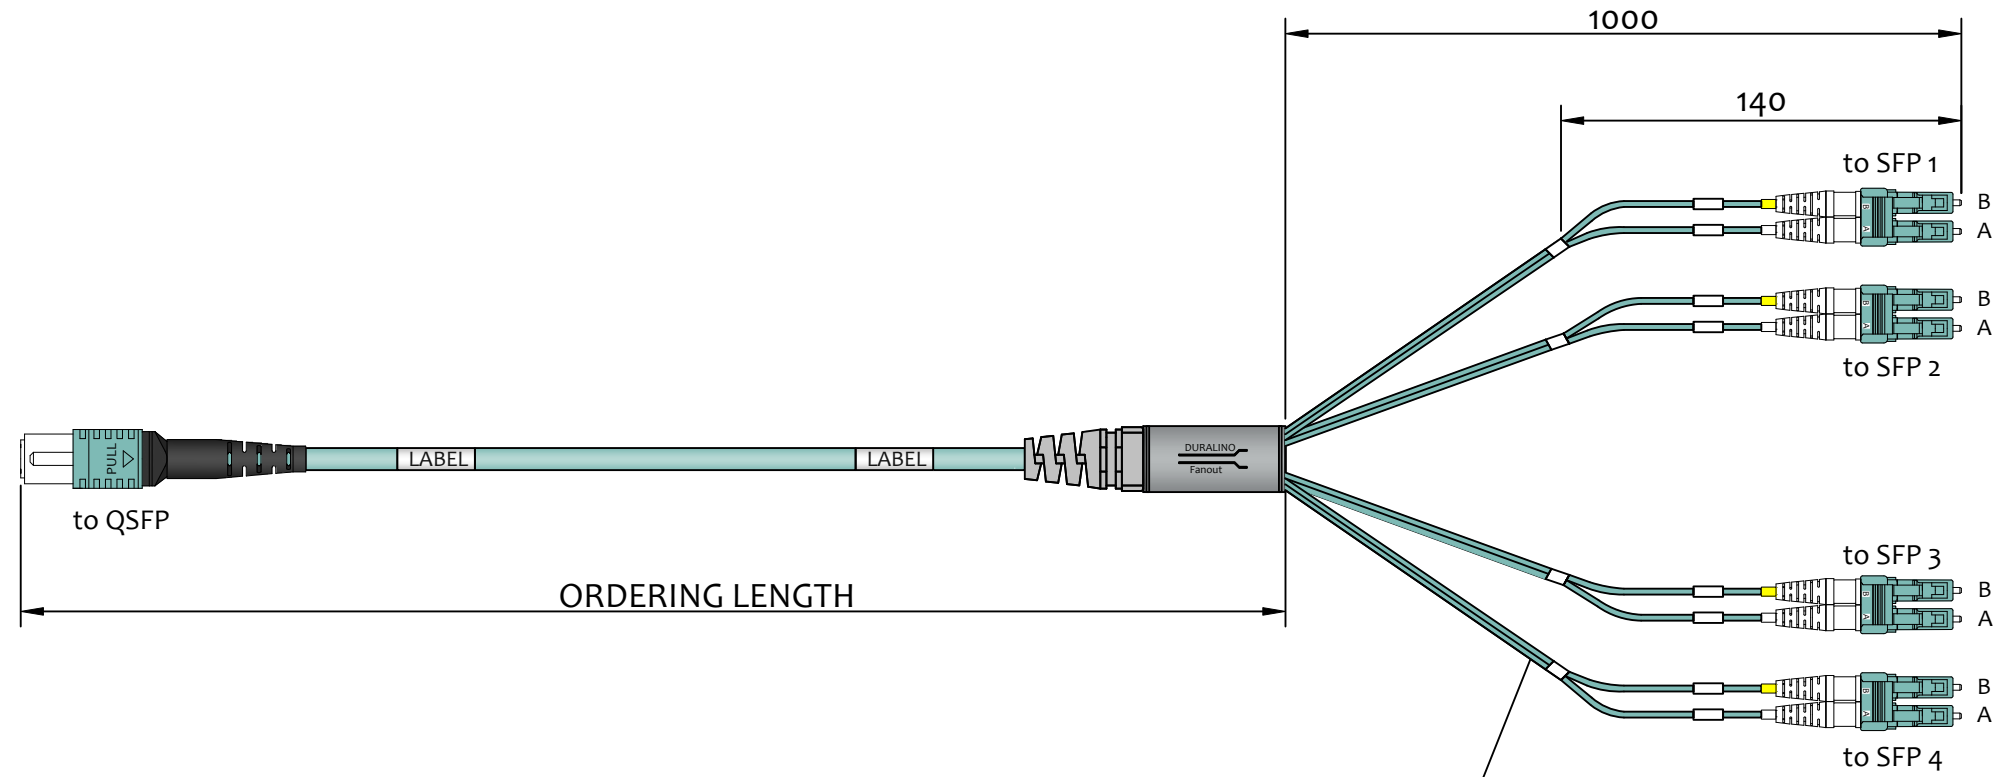

8 FIBERS

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - LC: OM3, OM4 - IL<0.25dB , RL>30dB , 850nm & 1300nm
LC: OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm

MTP: OM3, OM4 - IL<0.35dB , RL>20dB , 850nm & 1300nm
MTP: OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,
BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES
- 7 - NO PULLING SYSTEM IS APPLIED. AVAILABLE ON DEMAND
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,
DATE OF PRODUCTION AND ASSEMBLY LENGTH



REVISION-DATE: A - 12.05.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/05/12	TITLE: 12f 1xMTP - 4xLCD Duralino fanout QSFP/SFP		
New drawing		CHECKED BY, DATE: Pavlov/Matúš			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER:	DRAWING NUMBER: 1-W-1984_1_A	SHEET NO. 1 of 1	
		A	SIZE A3		